


Product data sheet



Suitable for storing the following hazardous substances:

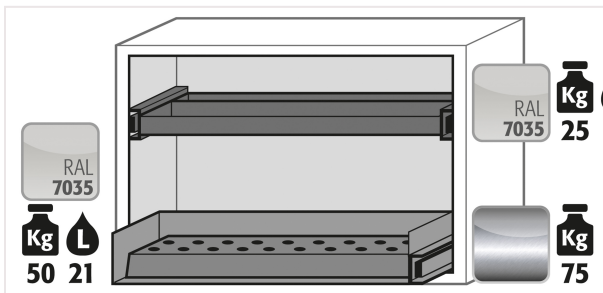

Order No. 30457-001-35300

Recommended retail price

Safety storage under bench cabinet UB-S-90 Model UB90.060.089.S

light grey (RAL 7035), interior equipment with 1 x drawer (sheet steel powder-coated), 1 x perforated insert (stainless steel 1.4016), 1 x second level drawer (sheet steel powder-coated)

Certification

- Fire resistance 90 minutes
- type tested in accordance with EN 14470-1
- DIN EN 16121/16122 conformity
- GS certified
- CE compliant

Function / construction

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Product data sheet

Technical Data

External dimensions W x D x H	893 x 574 x 600 mm
Internal dimensions W x D x H	771 x 452 x 502 mm
Depth with open doors	990.00 mm
Fire resistance level	90 minutes
CE compliant	yes (1)
GS certified	yes (1)
According to standard	EN 14470-1
According to standard	EN 16121/16122
UL 1275 listed	no
Automatic door closing system	No (0)
Door open arrest system	No (0)
Extraction air connection	50 DN
Differential pressure (10 times air change EK5/AK4)	1 Pa
Minimum exhaust air quantity 10 times	2 m³/h
Number of storage levels	2 piece
Max. load of perforated insert	75.00 kg
ecl@ss 14.0	40-06-01-04
UNSPSC code	24112402
Customs tariff number	94032080
GTIN	4054923196001

[To the product finder](#)
[To the flip catalogue](#)
[To asecos.com](#)

Product data sheet

