


Product data sheet



Suitable for storing the following hazardous substances:

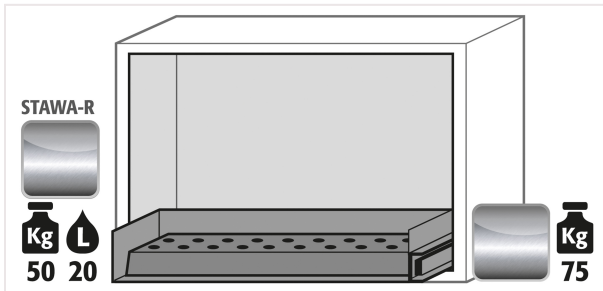

Order No. 30457-001-35303

Recommended retail price

Safety storage under bench cabinet UB-S-90 Model UB90.060.089.S
light grey (RAL 7035), interior equipment with 1 x drawer (stainless steel 1.4301), 1 x perforated insert (stainless steel 1.4016)

Certification

- Fire resistance 90 minutes
- type tested in accordance with EN 14470-1
- DIN EN 16121/16122 conformity
- GS certified
- CE compliant

Function / construction

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Product data sheet

Technical Data

External dimensions W x D x H	893 x 574 x 600 mm
Internal dimensions W x D x H	771 x 452 x 502 mm
Depth with open doors	990.00 mm
Net weight configuration	150.50 kg
Fire resistance level	90 minutes
CE compliant	yes (1)
GS certified	yes (1)
According to standard	EN 14470-1
According to standard	EN 16121/16122
UL 1275 listed	no
Automatic door closing system	No (0)
Door open arrest system	No (0)
Extraction air connection	50 DN
Differential pressure (10 times air change EK5/AK4)	1 Pa
Minimum exhaust air quantity 10 times	2 m³/h
Number of storage levels	1 piece
Max. load of perforated insert	75.00 kg
Total storage capacity of 1 L laboratory glass bottles	28 piece
Total storage capacity of 1 L laboratory PE bottles	28 piece
Total storage capacity of 2.5 L laboratory glass bottles	8 piece
ecl@ss 14.0	40-06-01-04
UNSPSC code	24112402
Customs tariff number	94032080
GTIN	4054923196032

[To the product finder](#)
[To the flip catalogue](#)
[To asecos.com](#)

Product data sheet

