
Product data sheet



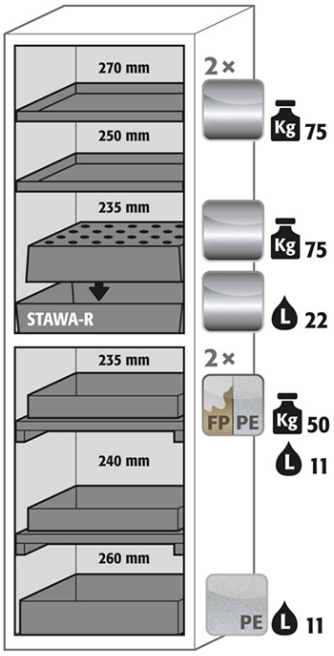

Order No. 30353-001-30355
Recommended retail price

Safety storage cabinet S-CLASSIC-90 Model S90.196.060.MH.WDAS
light grey (RAL 7035), interior equipment with 2 x shelf (stainless steel 1.4301), 1 x perforated insert, 1 x bottom collecting sump (stainless steel 1.4016), 2 x tray shelf, 1 x bottom collecting sump (PP)

Certification

- Fire resistance 90 minutes
- type tested in accordance with EN 14470-1
- DIN EN 16121/16122 conformity
- GS certified
- CE compliant

Function / construction

- **Robust construction and longevity:** triple hinged door, body made of powder-coated sheet steel, safety elements assembled outside the cabinet for increased protection against corrosion
- **Two in one:** 2 compartments (horizontal seperated) allow the storage of flammable liquids and aggressive chemicals in one cabinet
- **User-friendly and safe:** door open arrest system (standard), convenient and safe removal or storage of containers
- **No unauthorised use:** door lockable with profile cylinder (integration in an existing locking system possible)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system

Suitable for storing the following hazardous substances:



asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com

Product data sheet


Technical Data

External dimensions W x D x H	596 x 616 x 1968 mm
Internal dimensions W x D x H	top: 450 x 524 x 877 bottom: 450 x 524 x 845 mm
Extraction air connection	75 DN
Number of storage levels	5 piece
CE compliant	Yes
Differential pressure (10 times air change EK5/AK4)	5 Pa
Differential pressure (30 times air change)	5 Pa
ecl@ss 14.0	40-06-01-09
Recom. exhaust air quantity 30 times	13 m³/h
Fire resistance level	90 minutes
Depth with open doors	1.135,00 mm
GTIN	4054923056145
GS certified	Yes
Minimum exhaust air quantity 10 times	4 m³/h
Net weight configuration	290,00 kg
According to standard	EN 14470-1
According to standard	EN 16121/16122
Max. load of shelves	75.00/50.00 kg
Max. load of perforated insert	75.00 kg
Automatic door closing system	No
Door open arrest system	Yes
Door opening angle	89 °
UNSPSC code	24112402
Capacity of bottom collecting sump	22.00/11.00 litres
Customs tariff number	94032080
Weight	299 kg
Material of storage levels	stainless steel / metal free

To the product finder **To the flip catalogue** **To asecos.com**

asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com

Product data sheet

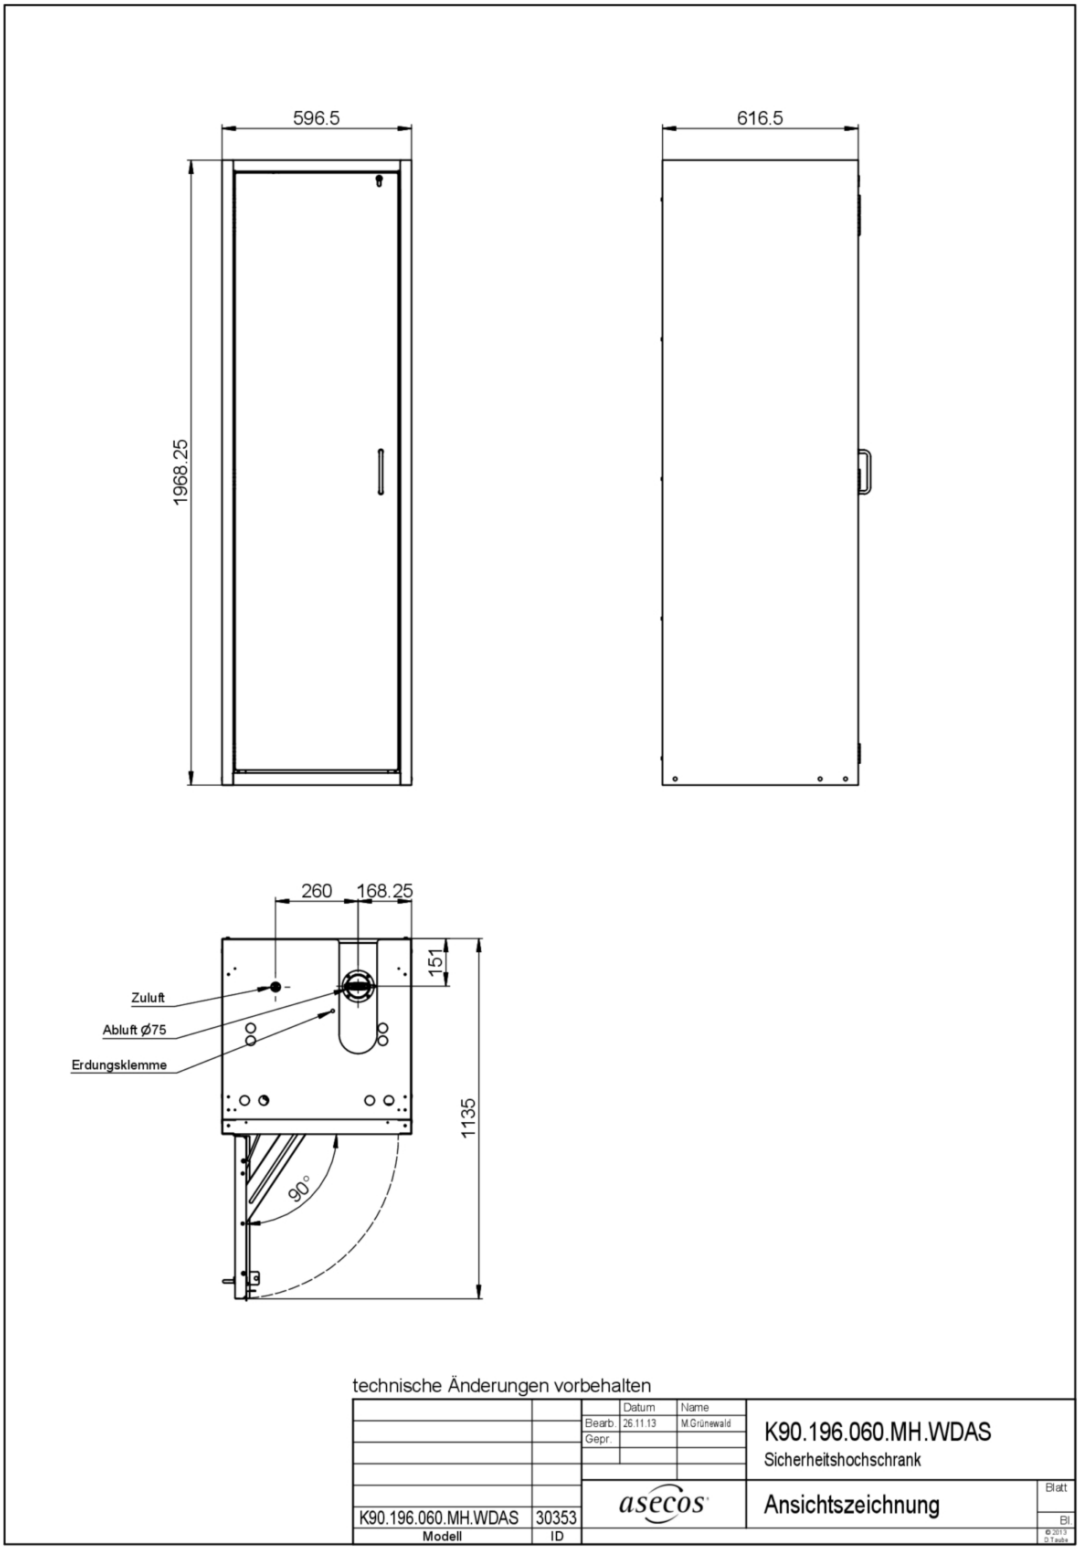

asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com