


# Product data sheet



Suitable for storing the following hazardous substances:

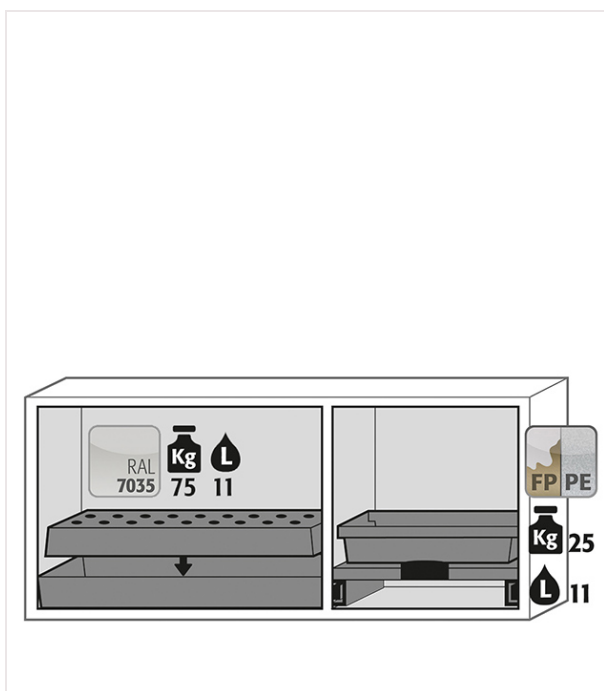

Order No. 30377-001-33846

Recommended retail price

## Combi safety storage cabinet K-UB-90 Model K90.060.140.050.UB.3T

light grey (RAL 7035), interior equipment with 1 x perforated insert, 1 x bottom collecting sump (sheet steel powder-coated), 1 x pull-out shelf (panel/PP melamine resin-coated)

### Certification

- Fire resistance 90 minutes
- type tested in accordance with EN 14470-1
- DIN EN 16121/16122 conformity
- CE compliant

### Function / construction

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **No unauthorised use:** doors lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system, extraction of both compartments through one ventilation connection


# Product data sheet

## Technical Data

|                                                     |                                                    |
|-----------------------------------------------------|----------------------------------------------------|
| External dimensions W x D x H                       | 1402 x 502 x 601 mm                                |
| Internal dimensions W x D x H                       | left: 770 x 380 x 502<br>right: 440 x 468 x 562 mm |
| Extraction air connection                           | 50 DN                                              |
| Number of storage levels                            | 2 piece                                            |
| CE compliant                                        | Yes                                                |
| Differential pressure (10 times air change EK5/AK4) | 1 Pa                                               |
| Differential pressure (30 times air change)         | 10 Pa                                              |
| ecl@ss 14.0                                         | 40-06-01-02                                        |
| Recom. exhaust air quantity 30 times                | 8 m³/h                                             |
| Fire resistance level                               | 90 minutes                                         |
| Depth with open doors                               | 964.00 mm                                          |
| GTIN                                                | 4054923137509                                      |
| GS certified                                        | No                                                 |
| Minimum exhaust air quantity 10 times               | 3 m³/h                                             |
| Net weight configuration                            | 174.00 kg                                          |
| According to standard                               | EN 14470-1                                         |
| According to standard                               | EN 16121/16122                                     |
| Max. load of drawers                                | 25 kg                                              |
| Max. load of perforated insert                      | 75.00 kg                                           |
| Automatic door closing system                       | No                                                 |
| Door open arrest system                             | No                                                 |
| Door opening angle                                  | 135 °                                              |
| UNSPSC code                                         | 24112402                                           |
| Volume of pull-outs                                 | 11.00 litres                                       |
| Capacity of bottom collecting sump                  | 16.50 litres                                       |
| Customs tariff number                               | 94032080                                           |
| Weight                                              | 190.5 kg                                           |
| Material of storage levels                          | sheet steel                                        |

[To the product finder](#)
[To the flip catalogue](#)
[To asecos.com](#)

# Product data sheet

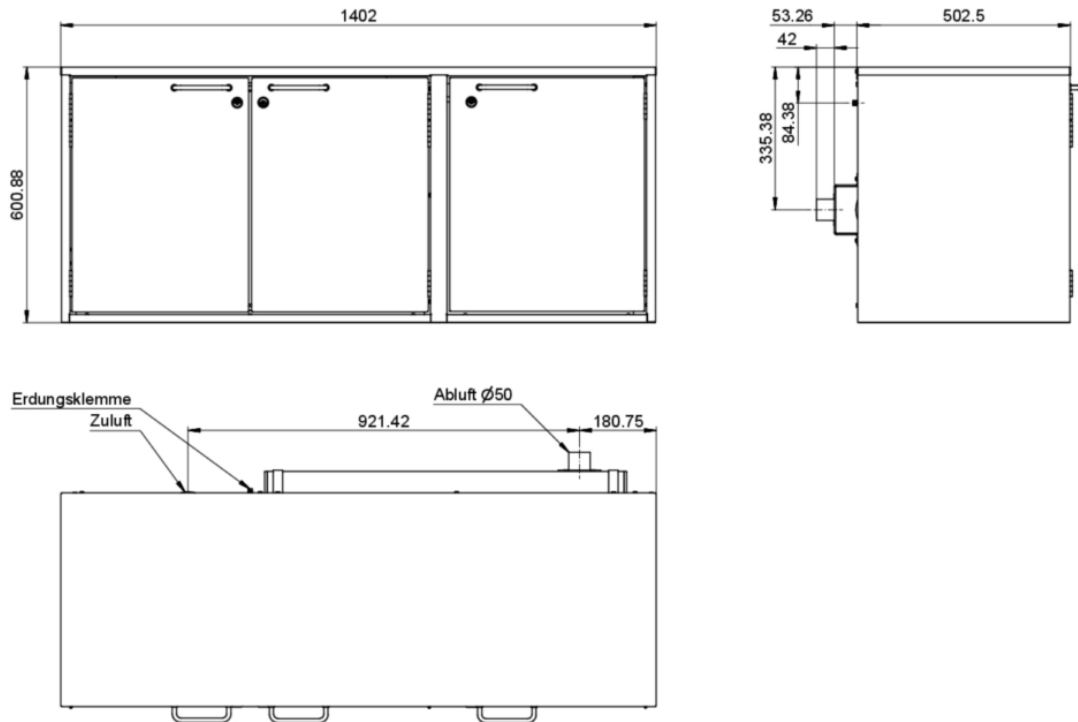

technische Änderungen vorbehalten

|                       |       |        |            |                                             |                   |    |
|-----------------------|-------|--------|------------|---------------------------------------------|-------------------|----|
|                       |       | Datum  | Name       | K90.060.140.050.UB.3T<br>Sicherheitsschrank | Blatt             |    |
|                       |       | Bearb. | M.Gronwald |                                             |                   | Bl |
|                       |       | Gepr.  |            |                                             |                   |    |
|                       |       |        |            |                                             |                   |    |
|                       |       | asecos |            |                                             | Ansichtszeichnung |    |
| K90.060.140.050.UB.3T | 30377 |        |            |                                             |                   |    |
| Modell                | ID    |        |            |                                             |                   |    |