
Product data sheet



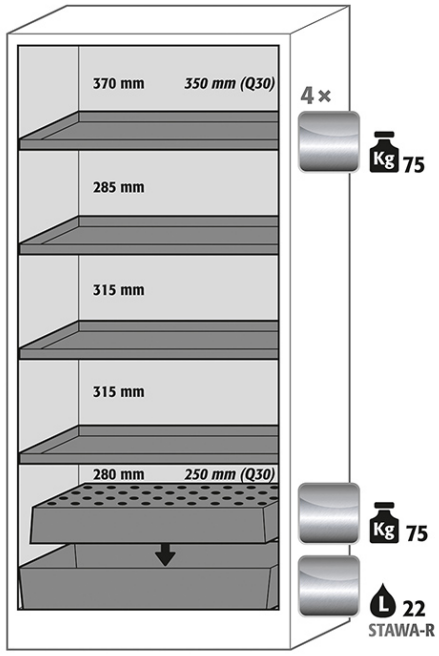

Order No. 31009-068-30048
Recommended retail price (Germany) 2.617,00 € - carriage paid*

Safety storage cabinet Q-CLASSIC-30 Model Q30.195.086.WDR
Body colour anthracite grey, with wing door in Reseda green (RAL 6011), interior equipment with 4 x shelf (stainless steel 1.4301), 1 x perforated insert (stainless steel 1.4016), 1 x bottom collecting sump (stainless steel 1.4301)

Certification

- Fire resistance 30 minutes
- type tested in accordance with EN 14470-1
- DIN EN 16121/16122 conformity
- CE compliant

Function / construction

- **Robust construction and longevity:** triple hinged door, cabinet body made of melamine resin and flame retardant special plates, safety elements assembled outside the storage compartment for increased protection against corrosion, doors with metal front as well as scratch-and impact-resistant surface, easy to clean
- **Easy handling with comfort:** door stops in any position, self-closing in the event of fire
- **No unauthorised use:** door lockable with profile cylinder (integration in an existing locking system possible)
- **Easy transport:** integrated transport base with removable, optional base cover or adjusting aids with base cover
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system

Suitable for storing the following hazardous substances:



asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com

Product data sheet


Technical Data

External dimensions W x D x H	864 x 620 x 1947 mm
Internal dimensions W x D x H	750 x 519 x 1626 mm
Extraction air connection	75 DN
Number of storage levels	5 piece
CE compliant	Yes
Differential pressure (10 times air change EK5/AK4)	10 Pa
ecl@ss 14.0	40-06-01-09
Entry width transport base	1.088 mm
Entry height transport base	90 mm
Fire resistance level	30 minutes
FM 6050 approved	No
Total storage capacity of 1 L laboratory glass bottles	147 piece
Total storage capacity of 1 L laboratory PE bottles	147 piece
Total storage capacity of 2.5 L laboratory glass bottles	60 piece
Depth with open doors	1.394,00 mm
GTIN	4054923089426
GS certified	No
Minimum exhaust air quantity 10 times	6 m³/h
Net weight configuration	218,00 kg
According to standard	EN 14470-1
According to standard	EN 16121/16122
Max. load of shelves	75.00 kg
Max. load of perforated insert	75.00 kg
Automatic door closing system	No
Door open arrest system	No
Door opening angle	90 °
UNSPSC code	24112402
Capacity of bottom collecting sump	22.00 litres
Customs tariff number	94032080
Weight	230 kg
Material of storage levels	stainless steel

To the product finder **To the flip catalogue** **To asecos.com**

asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com

Product data sheet

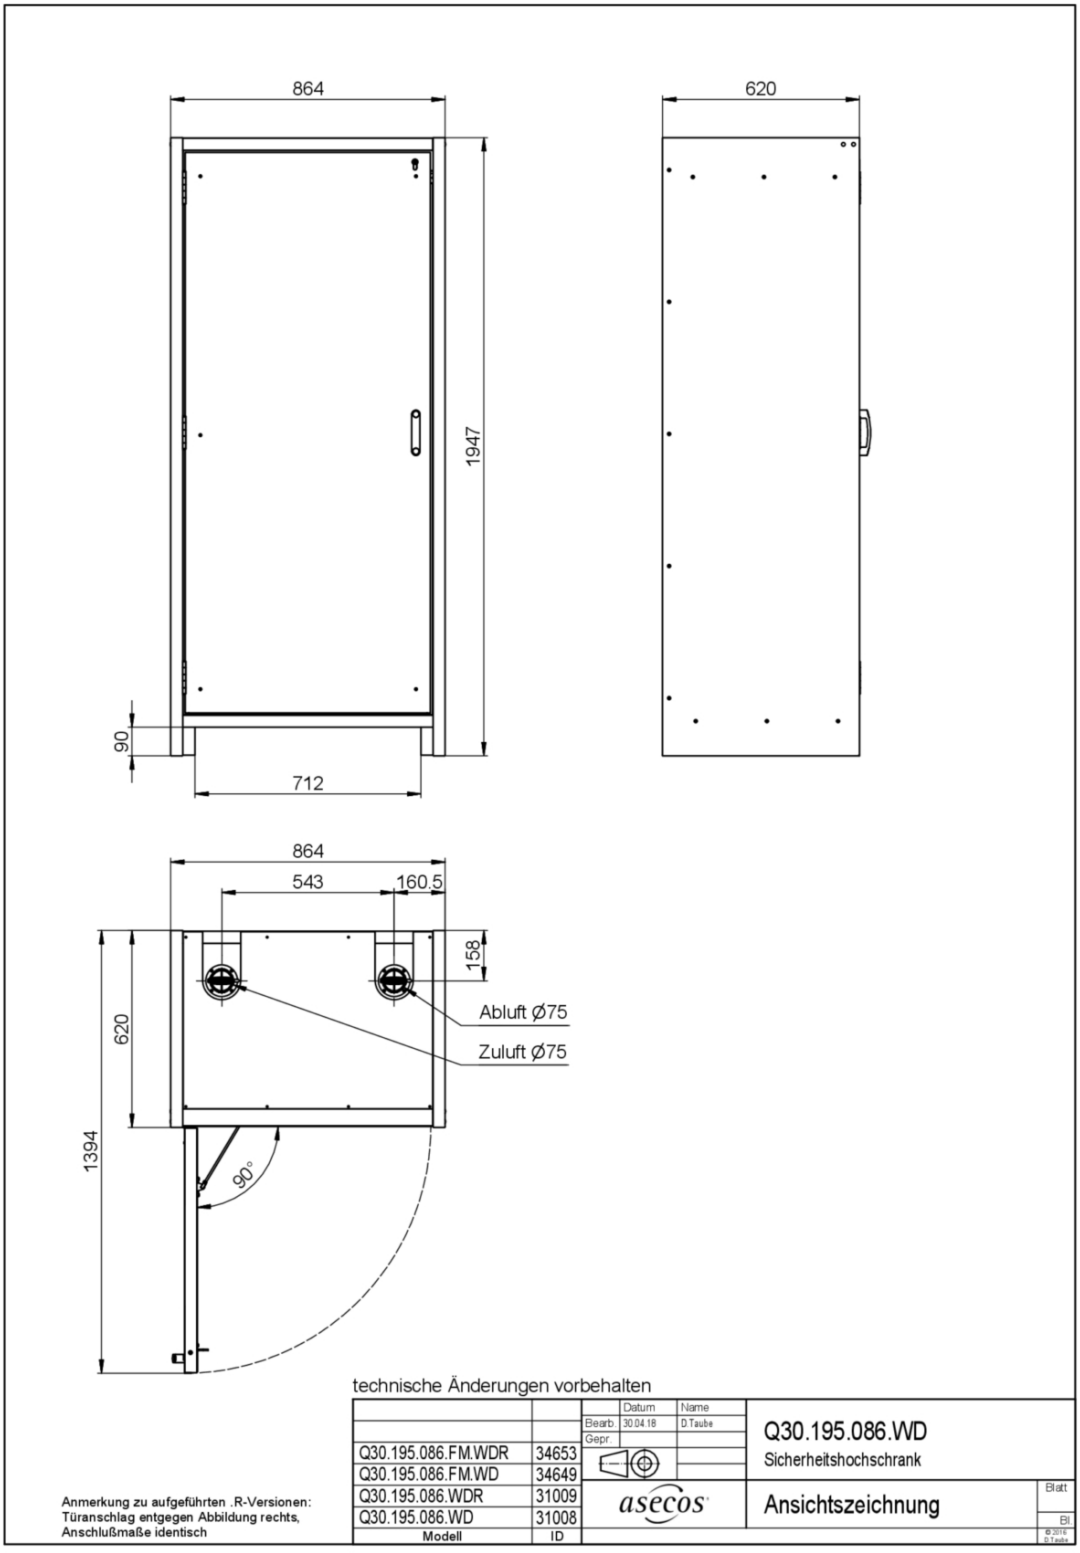

asecos GmbH
Weiherfeldsiedlung 16–18
63584 Gründau
info@asecos.com