


ID-Nr. 30606-005
Model SL.196.120.MV

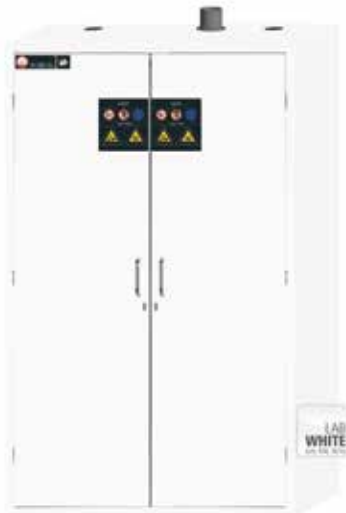

Cabinet for acids and alkalis SL-CLASSIC
Model SL.196.120.MV, laboratory white (sim. RAL 9016)

Safe and approved storage of aggressive, non flammable hazardous materials in working areas

Function / construction:

- **Robust construction and longevity:** cabinet body made of powder-coated sheet steel, safety elements assembled outside the storage compartment for increased protection against corrosion
- **Two in one:** two hermetically separated storage compartments allow the isolated storage of acids and bases in one cabinet
- **No unauthorised use:** doors lockable with profile cylinder (integration in an existing locking system possible)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **ventilation:** integrated metal-free air ducts ready for connection to a technical exhaust system with only one extraction air inlet

| Dimensions | |
|-------------------|------------|
| Width (external) | 1197.00 mm |
| Depth (external) | 603.00 mm |
| Height (external) | 1965.00 mm |
| Width (internal) | 485.00 mm |
| Depth (internal) | 570.00 mm |
| Height (internal) | 1869.00 mm |

The available internal dimensions can vary depending on the interior equipment package.

| Weight / Load | |
|-----------------------------------|--------------------------|
| Weight without interior equipment | 215 kg |
| Distributed load | 240.00 kg/m ² |
| Maximum load | 300 kg |

| Ventilation | |
|---|----------------------|
| extraction air connection | 75 DN |
| Recom. exhaust air quantity 30 times | 31 m ³ /h |
| Differential pressure (30 times air change) | 10 Pa |

| Colouring / Surface finish | |
|------------------------------|----------------------------------|
| Body colour | laboratory white (sim. RAL 9016) |
| Body surface finish | plain |
| Door / Drawer colour | laboratory white (sim. RAL 9016) |
| Door / Drawer surface finish | plain |

| General Information | |
|-----------------------|------------|
| Number of doors | 2 |
| Depth with open doors | 1153.00 mm |
| Customs tariff number | 94032080 |

For further information please visit www.asecos.com